


APPLICATION OF DOUBLE-SIDED TAPE

COMPACT

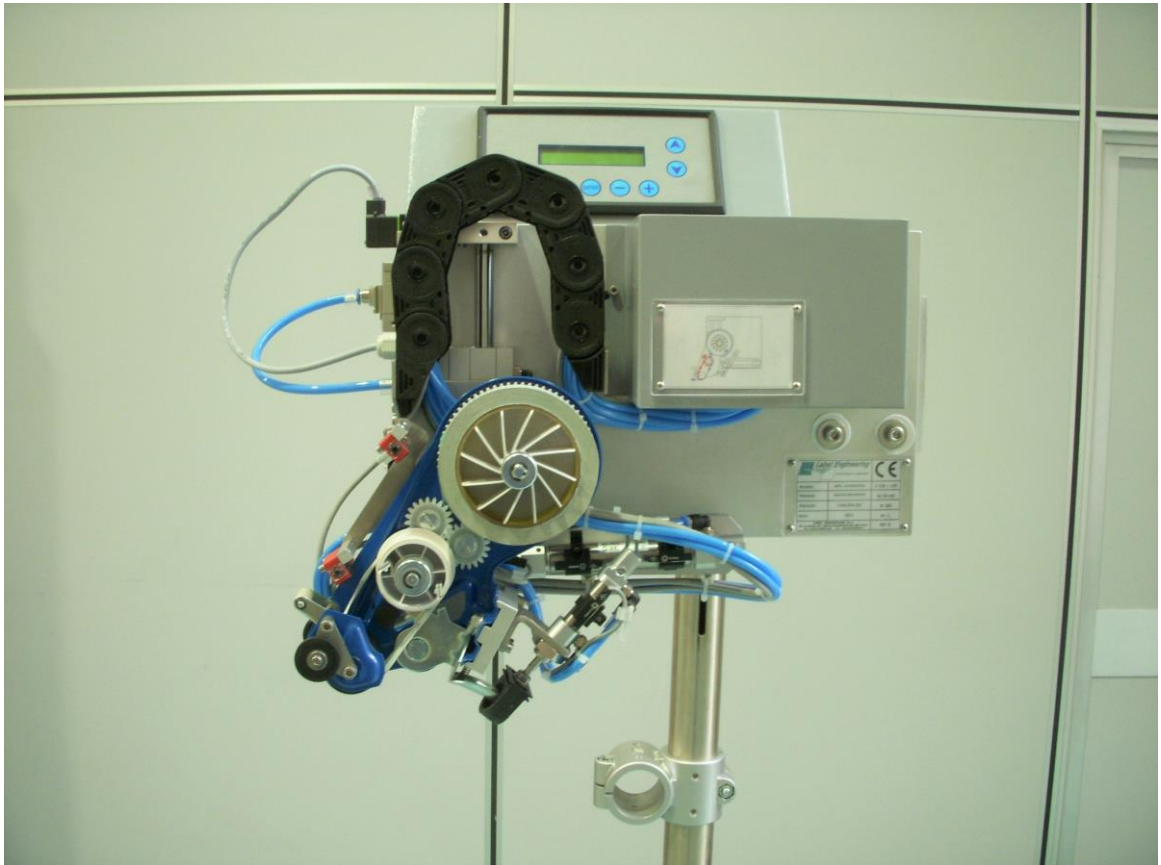

Double-sided tape application system on cardboard cores.

Using labeling technology, this double-sided tape distribution and application device was designed.

Our technical department, **combining the handling dynamics that characterize our applicators with specific mechanisms for the management of such a particular product as the double-sided adhesive**, has created a device mounted on a column, suitable for managing the transfer of double-sided tape on any type of packaging.



The control electronics managed by a microprocessor integrated into the machine body makes the system intuitive and easy to use for the operator.



TECHNICAL FEATURES

COMPACT

Group of distribution and application of double-sided tape.

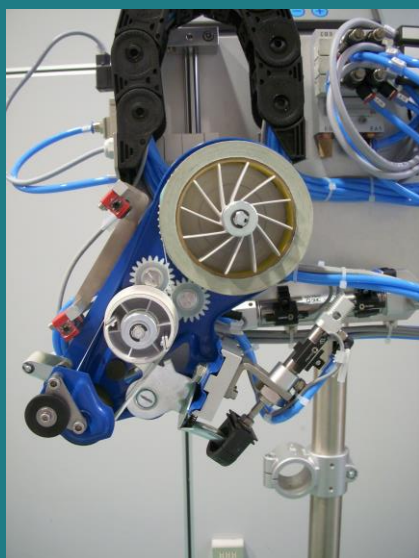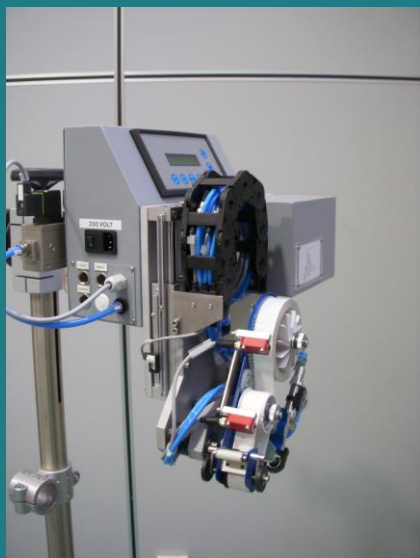

Double sided tape width : 25 mm.
Double sided tape length : 66 mt.
Dispensing speed : 12 m./min.

LABEL ENGINEERING Srl
Via Bernardino Zenale 19
20024 Garbagnate Milanese (MI) Italy
tel. +39 02 99021148
fax +39 02 99022613

info@label-engineering.it
www.label-engineering.it