


LABELLING HEADS

APPLY LABEL COMPACT³

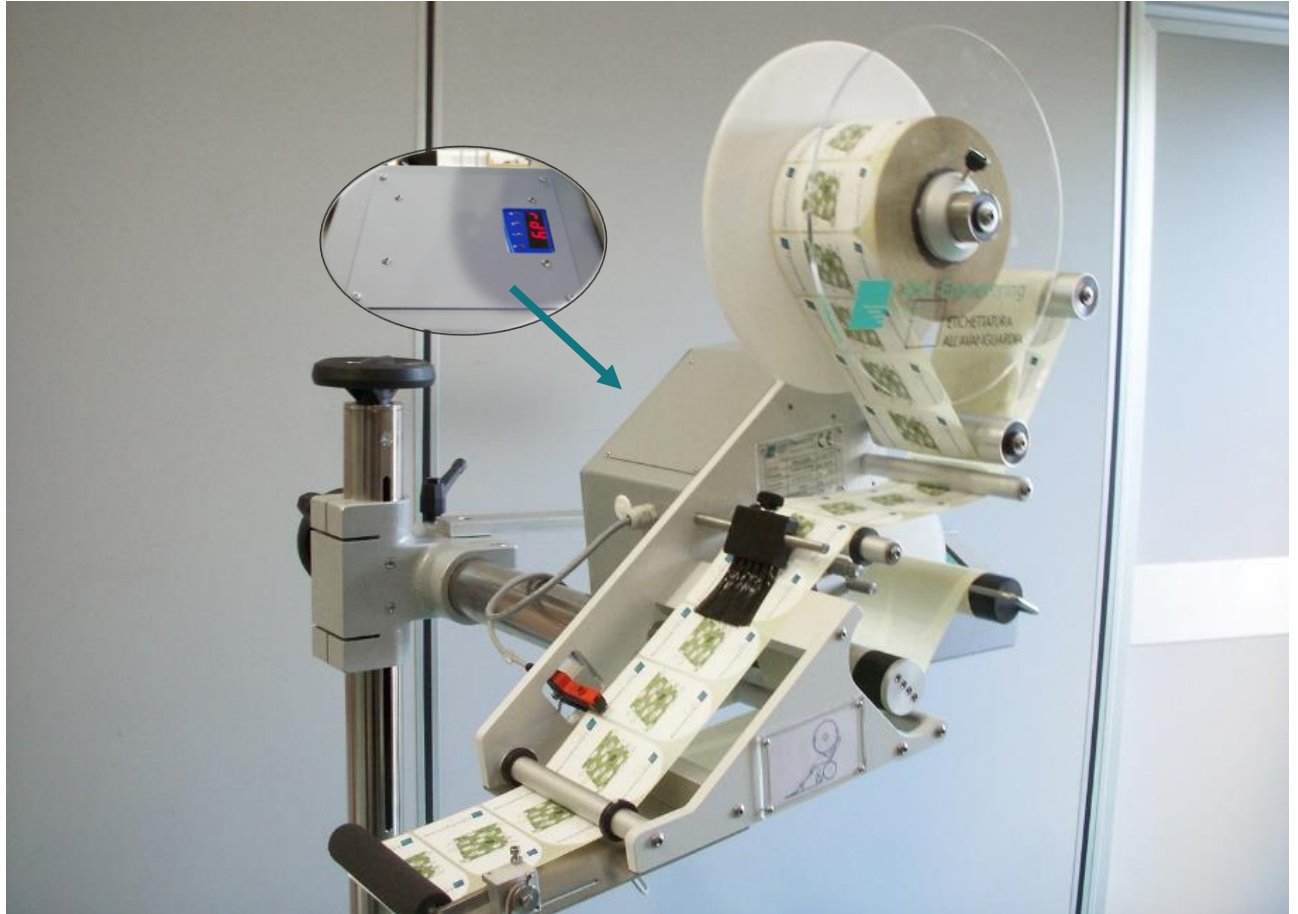

APPLY LABEL COMPACT³, an automatic labelling head with innovative technical solutions that enhance its compactness, ease of use and sturdiness.

Available in **two models**, in right and left mounting versions, made of sturdy metal structure, it can distribute self-adhesive labels **up to 80 or 130 mm wide** at **dispensing speeds between 10 and 25 m/min.**

The motorization with stepping motor, the **control electronics managed by a microprocessor integrated into the machine structure**, make this labelling head an easy-to-use machine to integrate into the packaging lines.



TECHNICAL FEATURES

APPLY LABEL COMPACT³

Labelling head suitable for application on products of all shapes and characteristics.
Thanks to high quality components, **Apply Label Compact³** labelling heads are suitable for integration into existing packaging lines.

Label width :	10 mm min. – 130 mm max
Label length :	10 mm min. – 350 mm max
Reel holder :	outside reel Ø 280 mm max inside reel Ø 40 mm Ø 45–76 mm with adapters
Detection labels gap :	with fork photocell
Pre-dispensing adjustment :	with ultrasonic sensor (optional)
Output :	from 5 to 25 m/min. digital setting
Application start delay :	electronic up to 1 sec.
Label counter :	electronic by preselection
Power supply :	220-230 V, 50-60 Hz, 100 W
Dimensions :	550 x 570 x 290 mm
Weight :	17 Kg. (label reel excluded)

Available models	Label width	Output
CTS 80	up to 80 mm max	5÷25 m/min.
CTS 130	up to 130 mm max	5÷20 m/min.

LABEL ENGINEERING Srl
Via Bernardino Zenale 19
20024 Garbagnate Milanese (MI) Italy
tel. +39 02 99021148
fax +39 02 99022613

info@label-engineering.it
www.label-engineering.it

Label Engineering reserves the right to make construction changes without prior notice that may lead to changes in the characteristics or performances indicated.

