


## LABELLING HEADS

### APPLY LABEL COMPACT SPEED MASTER

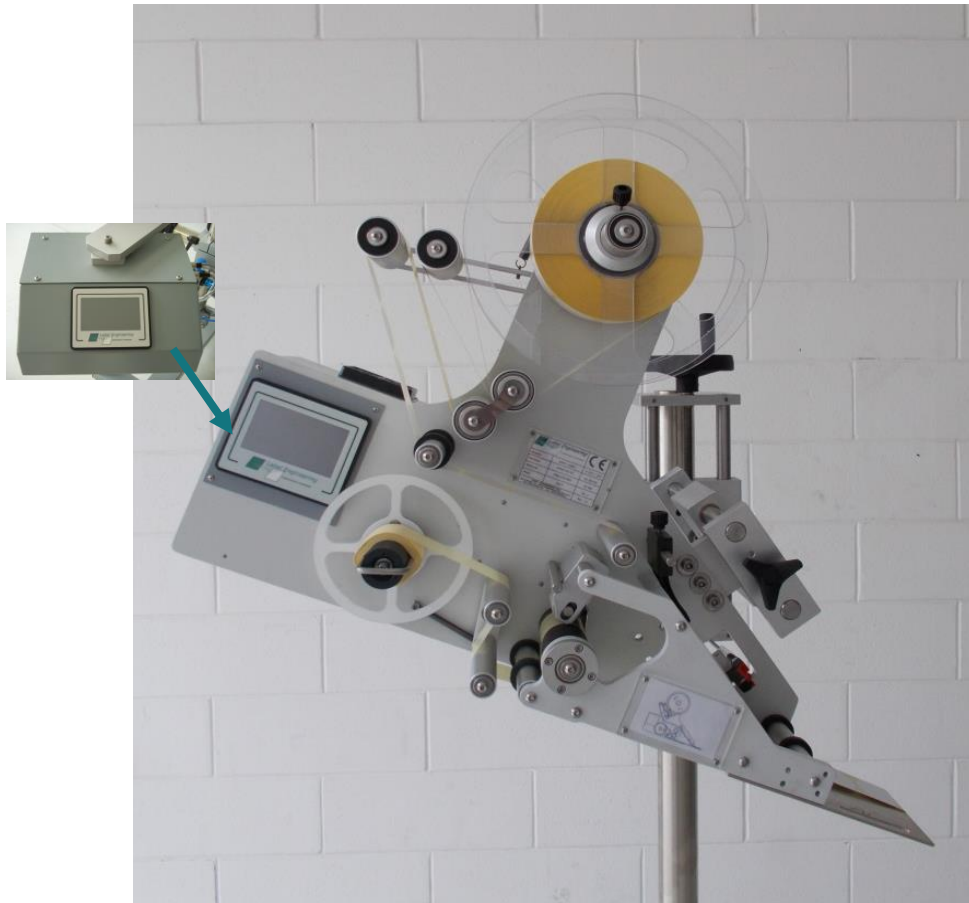

**Labelling heads APPLY LABEL COMPACT SPEED MASTER** are characterized by innovative technological solutions, managed with cutting-edge electronics, versatile and built with modularity.

They are available in **three models** and two mounting versions, suitable to dispense self-adhesive labels with **width of up to 200mm, distribution speeds between 10 and 100 m/min** depending on the models and electronic equipment.

**The high performance**, the step-by-step motorization and the **modern microprocessor control electronics** make **Apply Label labellers** functional, suitable for any type of application and simple to use.



# TECHNICAL FEATURES

## APPLY LABEL COMPACT SPEED MASTER

**Automatic labelling heads**, equipped with **Touch Screen control unit**, suitable for flat products for *upper, lateral and lower application* of pre-printed labels placed on reels.  
On request, assembly on columns in nickel-plated FE or stainless steel, equipped with a system of micrometric vertical/horizontal adjustments for integration on existing conveyor belts.

Label width :	10 mm min. – 200 mm max
Label length :	10 mm min. – 800 mm max
Reel holder :	outside reel Ø 280 mm max 380 mm max (motorized as optional) inside reel Ø 40 mm Ø 45-76 mm with adapters
Detection labels gap :	with fork photocell with ultrasonic sensor (optional)
Pre-dispensing adjustment :	electronics with digital control
Missing label recovery :	digital control setting
Application start delay :	electronic up to 1 sec.
Label counter :	electronic by preselection
Power supply :	220-230 V, 50-60 Hz, 400 W
Dimensions :	500 x 600 x 250÷500 mm
Weight :	25÷40 Kg. (label reel excluded)

Available models	Label width	Output
CTS 80 SM	up to 80 mm max	10÷100 m/min.
CTS 130 SM	up to 130 mm max	10÷80 m/min.
CTS 200 SM	up to 200 mm max	10÷40 m/min.

- Optional :**
- ❖ Encoder
  - ❖ Oversized reel holders, also motorized
  - ❖ Rewinding of silicone paper with independent motorization
  - ❖ Check for imminent end of labels
  - ❖ Rewinder overflow control
  - ❖ Alarm signals with luminous acoustic warning
  - ❖ Overprinting with Ink-jet marking unit
  - ❖ Pneumatic applicator for non-contact application (air blow) even with fixed stroke and self-sized cylinders

*Label Engineering reserves the right to make construction changes without prior notice that may lead to changes in the characteristics or performances indicated.*

**LABEL ENGINEERING Srl**  
**Via Bernardino Zenale 19**  
**20024 Garbagnate Milanese (MI) Italy**  
**tel. +39 02 99021148**  
**fax +39 02 99022613**

[info@label-engineering.it](mailto:info@label-engineering.it)  
[www.label-engineering.it](http://www.label-engineering.it)

